


RTA-OSEK

Infineon C166 family with the Tasking Compiler

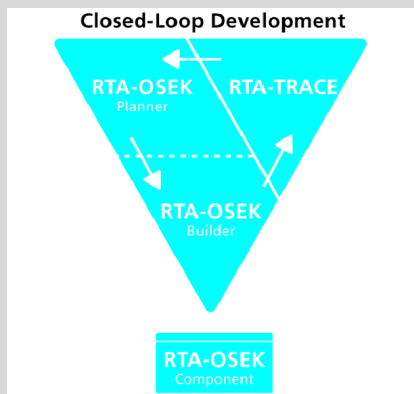

- OSEK/VDX OS version 2.2 certified OS
- RTOS overhead: 12 bytes RAM, 99 bytes ROM
- Category 2 interrupt latency: 196 CPU cycles
- Applications include: Engine Management, Body Electronics, Fuel Cell Control, etc.

RTA-OSEK

RTA-OSEK provides an application design environment that combines the smallest and fastest OSEK RTOS with a unique timing analysis tool.

This port data sheet discusses the Infineon C166 family port of the RTA-OSEK kernel alone and should be read in conjunction with the Technical Product Overview "*Developing Embedded Real-Time Applications with RTA-OSEK*" available from LiveDevices.

The kernel element of RTA-OSEK is a fixed priority, pre-emptive real-time operating system that is compliant to the OSEK/VDX OS standard version 2.2 for all four conformance classes (BCC1, BCC2, ECC1 and ECC2) and intra processor communication using OSEK COM Conformance Classes A and B (CCCA and CCCB).

All CPU overheads of the kernel have low worst case bounds and little variability in execution time. The kernel is particularly suited to systems with very tight constraints on hardware costs and where run-time performance must be guaranteed

The kernel is configured using an offline tool provided with RTA-OSEK. Determining in advance which features are used allows

memory requirements to be minimized and API calls to be optimized for greatest efficiency.

All tasks and ISRs in RTA-OSEK run on a single stack – even extended tasks. This allows dramatic reductions in application stack space requirements.

The RTA-OSEK kernel is designed to be scalable. When a task uses queued activation or waits on events, the additional RTOS overhead required to support these features is paid by the task rather than by the system. This means that a basic single activation task uses the same resources in a BCC1 system as it does in an ECC2 system.

Software Environment

Compiler/Assembler/Linker

The libraries containing the code for the RTA-OSEK kernel have been built using the following tools:

- Tasking C compiler version 7.5r1
- Tasking C166/ST10 Assembler version 7.5r1
- Tasking Linker/Locator Version 7.5r1

Memory Model

RTA-OSEK supports all variants of the small memory model.

ORTI Debugger Support

ORTI is the OSEK Run-Time Interface that is supported by RTA-OSEK for the following debuggers:

- Crossview Pro C166/ST10 v7.5r1, RADM 011

Further information about ORTI for RTA-OSEK can be found in the ORTI Guide.

Hardware Environment

RTA-OSEK supports all variants of the Infineon C166 Family including the C161, C163, C164, C165, C167, XC161 and XC164 microcontrollers. RTA-OSEK does not support the 80C166 microcontroller.

Interrupt Model

Fifteen levels of nested interrupts are supported.

Floating Point Support

The Tasking compiler provides re-entrant software floating-point libraries and does not require additional support from RTA-OSEK.

Evaluation Board Support

RTA-OSEK for the Infineon C166 Family can be used with any evaluation board. An example application is provided to run on a Phytex KitCON-167 evaluation board. This application can be adapted for other target boards by adjusting the linker command file (to alter the RAM locations) and one source file (if alternative output pins are required).

Functionality

The below table outlines the restrictions on the maximum number of operating system objects allowed by RTA-OSEK.

Note that OSEK specifies that queued activations in an ECC2 sys-

	BCC1	BCC2	ECC1	ECC2
Max no of tasks	16 plus an idle task			
Max tasks per priority	1	16	1	16
Max queued activations	1	255	1	255
Max events per task	n/a	n/a	16	16
Max nested resources	255			
Max alarms	not limited by RTA-OSEK			
Max standard resources	255			
Max internal resources	not limited by RTA-OSEK			
Max application modes	255			

tem are only possible for basic tasks. Where tasks share a priority level, the maximum number of queued activations per priority level is 255.

The number of alarms, tasksets, schedules and schedule arrival-points is only limited by available hardware resources.

Memory Usage

The memory overhead of RTA-OSEK is:

Memory type	Overhead (bytes)
RAM	12
ROM/Flash	99

In addition to the RTOS overhead, each object used by an application has the following memory requirements:

Object	RAM Bytes	ROM Bytes
BCC1 task	0	24
BCC2 task	6	32
ECC1 task	22	42
ECC2 task	24	46
Category 1 ISR	0	0
Category 2 ISR	0	34
Resource	0	10
Internal Resource	0	0
Event	0	2
Alarm	6	28
Counter	2	26
Taskset (RW)	2	2
Taskset (RO)	0	2
Schedule	8	26
Arrivalpoint (RW)	6	6
Arrivalpoint (RO)	0	6

In addition to these static memory requirements each task priority and Category 2 interrupt has a stack overhead (in addition to application stack usage). The single stack model means that this overhead applies to each priority level rather than to each task. Similarly, for Category 2 interrupts this overhead applies for each unique interrupt priority. The below table shows stack usage for these objects.

RTA-OSEK provides an optimization for task termination if the

Object	Stack Bytes
Task priority level	54
Category 2 interrupt	42

user can guarantee that tasks only terminate from their entry function. Tasks that terminate from elsewhere are not eligible for this optimization and duly require 24 more stack bytes per priority level than indicated in the table above.

Performance

The following table gives the key kernel timings for operating system behavior in CPU cycles.

Task Type	Basic	Extended	Ref
Category 1 ISR Latency	68	68	K
Category 2 ISR Latency	196	196	A
Normal Termination	148	396	D
ChainTask	324	772	J
Pre-emption	320	708	C
Triggered by alarm	548	936	F
Schedule	268	648	Q
ReleaseResource	308	692	M
SetEvent	n/a	1044	S
Category 2 exit switch latency	244	624	E

All performance figures are for the non-optimized interface to RTA-OSEK. Using the optimized interface will result in shorter execution times for some operations. All tasks use lightweight termination and no pre or post task hooks were specified.

The execution time for every kernel API call is available on request from LiveDevices.

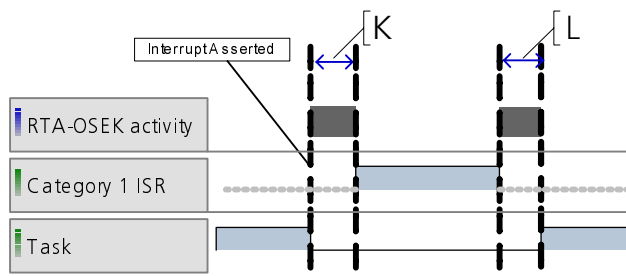


Figure 1 - Category 1 interrupt with return to interrupted task

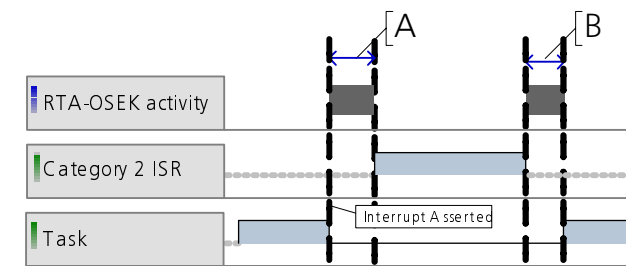


Figure 2 - Category 2 interrupt with return to interrupted task

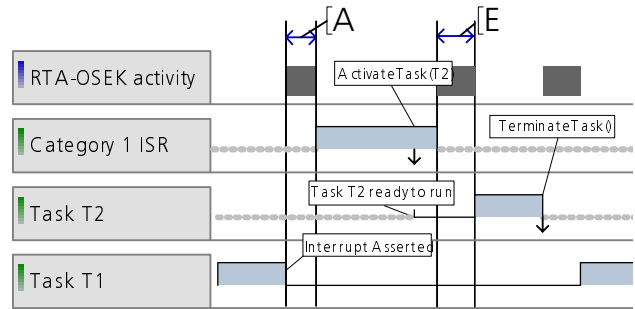


Figure 3 - Category 2 interrupt activates a higher priority task

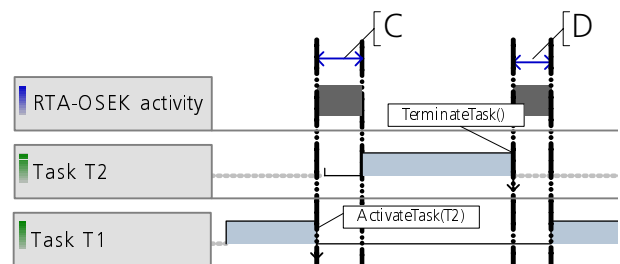


Figure 4 - Task activates a higher priority task

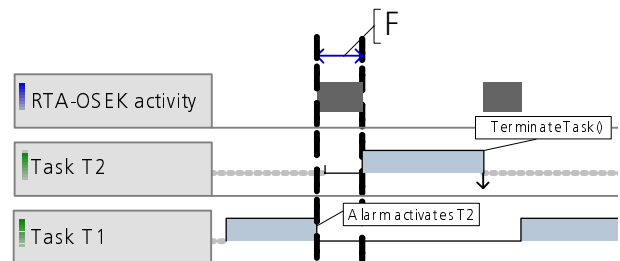


Figure 5 - Alarm activates task

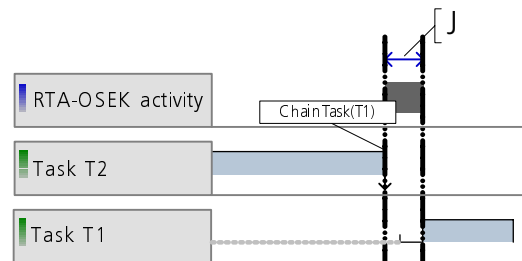


Figure 6 - Task chaining

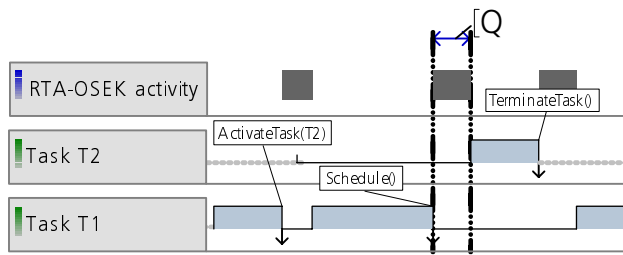


Figure 7 - Schedule() call

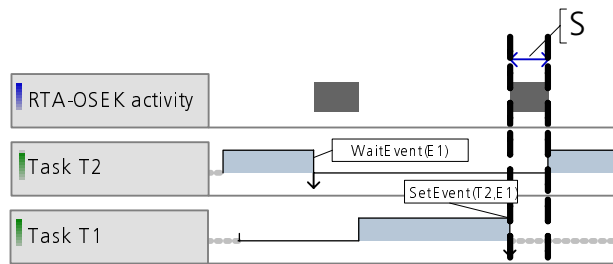


Figure 8 - Activation by SetEvent()

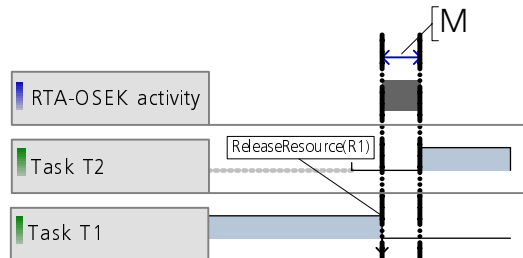


Figure 9 - ReleaseResource()

Benchmarks

The following sections shows benchmarks for RTA-OSEK memory usage for BCC1, BCC2, ECC1 and ECC2 conformant applications. The applications have the following framework:

- 8 tasks plus the idle task
- All basic tasks are lightweight tasks
- 1 Category 2 ISR with a 10ms minimum inter-arrival time
- 1 Counter
- 7 or 8 alarms, all attached to the same counter
- No resources or internal resources
- No hooks
- No schedules
- No tasksets
- Built using standard status

The following table shows the task priority configuration for each benchmark application:

Task/ISR	Stack (bytes)	Period (ms)	BCC1	BCC2	ECC1	ECC2
ISR1	10	10	IPL1	IPL1	IPL1	IPL1
A	10	10	8	8	8	8
B	20	20	7	7	7	7
C	30	20	6	6	6	6
D	40	30	5	5	5	5
E	50	50	4	4	4	4
F	60	80	3	3	3	3
G	70	100	2	2	2	2
H	80	150	1	1	1	2
Idle	10	-	idle	idle	idle	idle

The overhead figures give the ROM and RAM required for RTA-OSEK in addition to that required by the application. The RAM figure is shown split into RAM data and RAM stack.

BCC1

The BCC1 application uses 8 basic tasks with unique priorities.

This application has the following overheads:

Memory usage	Bytes
OS ROM	1247
OS RAM	540
	comprising RAM data
	62
	comprising RAM stack
	478

BCC2

The BCC2 application uses 8 basic tasks with unique priorities.

Tasks A-G are attached to 7 alarms. Task H is activated multiple times from Task A and has maximum queued activation count of 255.

This application has the following overheads:

Memory usage	Bytes
OS ROM	1523
OS RAM	546
comprising RAM data	60
comprising RAM stack	486

ECC1

The ECC1 application uses 7 basic tasks and 1 extended task with unique priorities. Task H is the extended task and it waits on a single event that is set by basic tasks A-G.

This application has the following overheads:

Memory usage	Bytes
OS ROM	1860
OS RAM	586
comprising RAM data	84
comprising RAM stack	502

ECC2

The ECC2 application uses 6 basic tasks and 2 extended tasks. Tasks G and H are the extended tasks and share a priority. The extended tasks wait on a single event that is set by tasks A-F.

This application has the following overheads:

Memory usage	Bytes
OS ROM	2430
OS RAM	640
comprising RAM data	114
comprising RAM stack	526

Stack Optimization

Using stack optimization with the benchmark example identifies that the following tasks can share internal resources:

"Tasks A, B and C

"Tasks D, E and F

"Tasks G and H

The benefit of this optimization is shown in the following table:

Total Stack Space (bytes)	BCC1	BCC2	ECC1	ECC2
Non-optimized	858	866	882	906
OS Overhead	478	486	502	526
Application Overhead	380	380	380	380
Optimized	388	388	412	412
OS Overhead	208	208	232	232
Application Overhead	180	180	180	180

Contact addresses:

LiveDevices Ltd.
Atlas House
Link Business Park
Osaldwick Link Road
Osaldwick
York YO10 3JB, Great Britain
Phone+44 (0) 1904-562580
Fax+44 (0) 1904-562581
info@livedevices.com
www.livedevices.com

ETAS GmbH
Borsigstraße 14
70469 Stuttgart, Germany
Phone+49 (711) 89661-102
Fax+49 (711) 89661-106
sales@etas.de
www.etas.de

ETAS Inc.
3021 Miller Road
Ann Arbor, MI 48103, USA
Phone+1 (888) ETAS INC
Fax+1 (734) 997-9449
sales@etas.us
www.etas.us

ETAS K.K.
9-1, Ushikubo 3-chome
Tsuzuki-ku
Yokohama 224-0012, Japan
Phone+81 (45) 912-9550
Fax+81 (45) 912-9552
sales@etas.co.jp
www.etas.co.jp

ETAS S. A. S.
1, place des Etats-Unis
SILIC 307
94588 Rungis Cedex, France
Phone+33 (1) 56700050
Fax+33 (1) 56700051
sales@etas.fr
www.etas.fr

ETAS Korea Co., Ltd.
3F, Samseung Bldg. 61-1
Yangjae-dong, Seocho-gu
Seoul, Korea
Phone+82 (2) 57 47-016
Fax+82 (2) 57 47-120
sales@etas.co.kr
www.etas.co.kr