


# RTA-OSEK

## Fujitsu 16FX/LX with the Softune Compiler

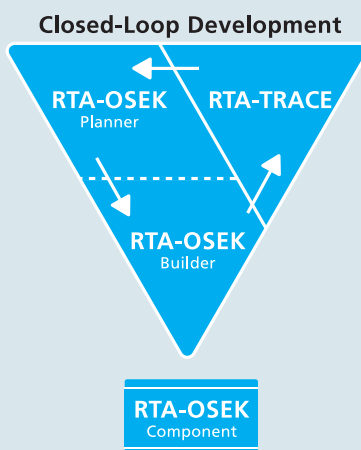

### Features at a Glance

- OSEK/VDX OS v2.2 Certified OS
- RTOS overhead: 14 bytes RAM, 83 bytes ROM
- Category 2 interrupt latency: 61 CPU cycles
- Applications include: Passenger comfort systems, Security access control, Body electronics



ETAS Group  
Automotive LifeCycle  
Solutions

### RTA-OSEK

RTA-OSEK provides an application design environment that combines the smallest and fastest OSEK RTOS with a unique timing analysis tool.

This port data sheet discusses the Fujitsu 16FX/LX port of the RTA-OSEK kernel alone and should be read in conjunction with the Technical Product Overview “*Developing Embedded Real-Time Applications with RTA-OSEK*” available from LiveDevices.

The kernel element of RTA-OSEK is a fixed priority, pre-emptive real-time operating system that is compliant to the OSEK/VDX OS standard version 2.3 for all four conformance classes (BCC1, BCC2, ECC1 and ECC2) and intra processor communication using OSEK COM Conformance Classes A and B (CCCA and CCCB).

All CPU overheads of the kernel have low worst case bounds and little variability in execution time. The kernel is particularly suited to systems with very tight constraints on hardware costs and where run-time performance must be guaranteed.

The kernel is configured using an offline tool provided with RTA-OSEK. Determining in advance which features are used allows memory requirements to be minimized and API calls to be optimized for greatest efficiency.

All tasks and ISRs in RTA-OSEK run on a single stack – even extended tasks. This allows dramatic reductions in application stack space requirements.

The RTA-OSEK kernel is designed to be scalable. When a task uses queued activation or waits on events, the additional RTOS overhead required to support these features is paid by the task rather than by the system. This means that a basic single activation task uses the same resources in a BCC1 system as it does in an ECC2 system.

### Compiler/Assembler/Linker

The libraries containing the code for the RTA-OSEK kernel have been built using the following tools:

- Fujitsu F2MC-16 Family Softune C Compiler Version V30L15

- Fujitsu F2MC-16 Family Softune Assembler Version V30L12
- Fujitsu F2MC-16 Family Softune Linker Version V30L11

### Memory Model

RTA-OSEK supports the medium memory model provided by the Softune compiler.

### ORTI Debugger Support

ORTI is the OSEK Run-Time Interface. Currently no ORTI compatible debuggers are supported by RTA-OSEK for the Fujitsu 16FX/LX. Further information about ORTI for RTA-OSEK can be found in the *RTA-OSEK ORTI Guide*.

### Hardware Environment

RTA-OSEK supports all variants of the Fujitsu 16FX/LX family.

### Interrupt Model

RTA-OSEK for the Fujitsu 16FX/LX family supports 9 interrupt priority levels.

### Floating Point Support

The Fujitsu 16FX/LX family of microcontrollers use software floating point.

### Evaluation Board Support

RTA-OSEK for the Fujitsu 16FX/LX can be used with any evaluation board. An example application is provided to run on the Fujitsu FLASH-CAN-100P-340 evaluation board. This application can be adapted for other target boards by adjusting the linker command file (to alter the RAM locations) and one source file (if alternative output pins are required).

### Functionality

The table below outlines the restrictions on the maximum number of operating system objects allowed by RTA-OSEK.

	BCC1	BCC2	ECC1	ECC2
Max no of tasks	16 plus an idle task			
Max tasks per priority	1	16	1	16
Max queued activations	1	255	1	255
Max events per task	n/a	n/a	16	16
Max nested resources	255			
Max alarms	Not limited by RTA-OSEK			
Max standard resources	255			

	BCC1	BCC2	ECC1	ECC2
Max internal resources	Not limited by RTA-OSEK			
Max application modes	255			

Note that OSEK specifies that queued activations in an ECC2 system are only possible for basic tasks. Where tasks share a priority level, the maximum number of queued activations per priority level is 255.

The number of alarms, tasksets, schedules and schedule arrivalpoints is only limited by available hardware resources.

### Memory Usage

The memory overhead of RTA-OSEK is:

Memory Type	Overhead (bytes)
RAM	14
ROM/Flash	83

In addition to the RTOS overhead, each object used by an application has the following memory requirements:

Object	RAM Bytes	ROM Bytes
BCC1 task	0	24
BCC2 task	6	34
ECC1 task	26	36
ECC2 task	28	40
Category 1 ISR	0	0
Category 2 ISR	0	34
Resource	0	10
Internal Resource	0	0
Event	0	2
Alarm	10	32
Counter	4	71
ScheduleTable	10	78
ScheduleTable Expiry	0	10
Taskset (RW)	2	2
Taskset (RO)	0	2
Schedule	12	26
Arrivalpoint (RW)	8	8
Arrivalpoint (RO)	0	8

In addition to these static memory requirements each task priority and Category 2 interrupt has a stack overhead (in addition to application stack usage). The single stack model means that this overhead applies to each

priority level rather than to each task. Similarly, for Category 2 interrupts this overhead applies for each unique interrupt priority. The table below shows stack usage for these objects.

Object	Stack Bytes
Task priority level	40
Category 2 interrupt	30

RTA-OSEK provides an optimization for task termination if the user can guarantee that tasks only terminate from their entry function. Tasks that terminate from elsewhere are not eligible for this optimization and duly require 30 more stack bytes per priority level than indicated in the table above.

### Performance

The following table gives the key kernel timings for operating system behavior in CPU cycles.

Task Type	Basic	Extended	Ref
Category 1 ISR Latency	22	22	K
Category 2 ISR Entry Latency	61	55	A
Category 2 Exit Latency	109	239	E
Normal Termination	97	239	D
ChainTask	193	488	J
Pre-emption	151	303	C
Triggered by alarm	297	447	F
Schedule	119	271	Q
ReleaseResource	139	288	M
SetEvent	n/a	579	S

All performance figures are for the non-optimized interface to RTA-OSEK. Using the optimized interface will result in shorter execution times for some operations. All tasks use lightweight termination and no pre or post task hooks were specified.

The execution time for every kernel API call is available on request from LiveDevices.

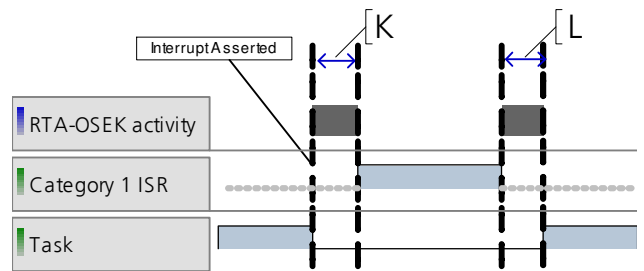


Figure 1 - Category 1 interrupt with return to interrupted task

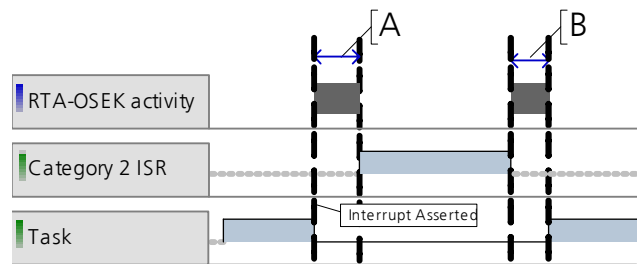


Figure 2 - Category 2 interrupt with return to interrupted task

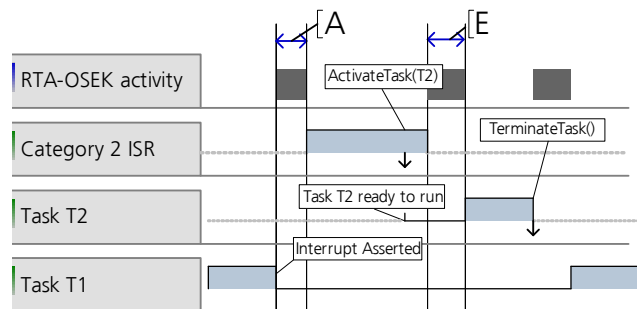


Figure 3 - Category 2 interrupt activates a higher priority task

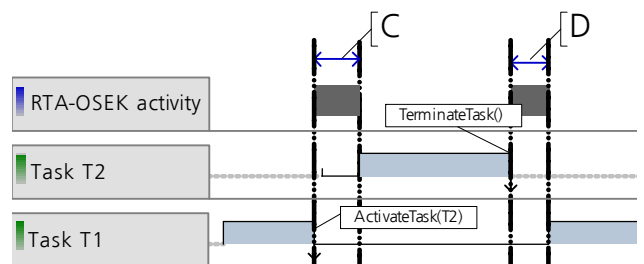


Figure 4 - Task activates a higher priority task

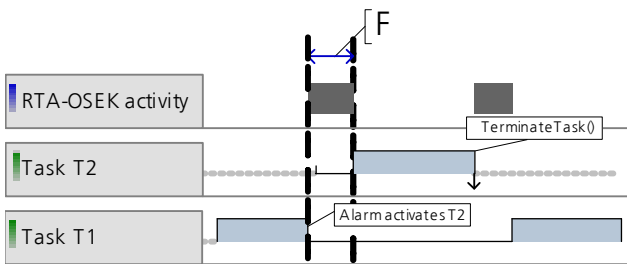


Figure 5 - Alarm activates task

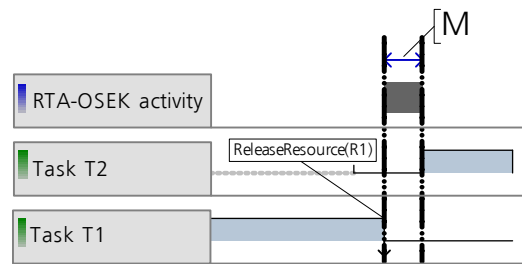


Figure 9 - ReleaseResource()

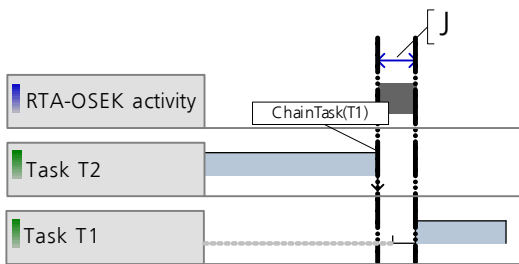


Figure 6 - Task chaining

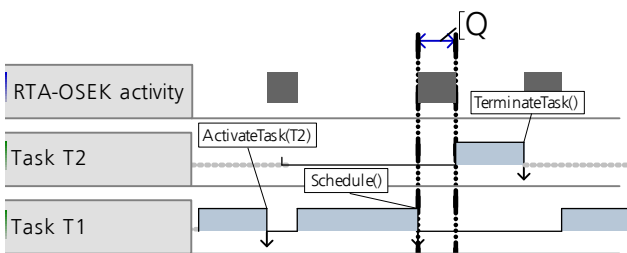


Figure 7 - Schedule() call

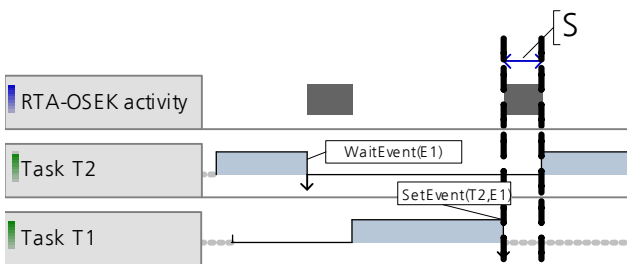


Figure 8 - Activation by SetEvent()

### Benchmarks

The following sections shows benchmarks for RTA-OSEK memory usage for BCC1, BCC2, ECC1 and ECC2 conformant applications. The applications have the following framework:

- 8 tasks plus the idle task
- All basic tasks are lightweight tasks
- 1 Category 2 ISR with a 10ms minimum inter-arrival time
- 1 Counter
- 7 or 8 alarms, all attached to the same counter
- No resources or internal resources
- No hooks
- No schedules
- No tasksets
- Built using standard status

The following table shows the task priority configuration for each benchmark application:

Task/ISR	Stack (bytes)	Period (ms)	BCC1	BCC2	ECC1	ECC2
ISR1	10	10	IPL1	IPL1	IPL1	IPL1
A	10	10	8	8	8	8
B	20	20	7	7	7	7
C	30	20	6	6	6	6
D	40	30	5	5	5	5
E	50	50	4	4	4	4
F	60	80	3	3	3	3

Task/ISR	Stack (bytes)	Period (ms)	BCC1	BCC2	ECC1	ECC2
G	70	100	2	2	2	2
H	80	150	1	1	1	2
Idle	10	-	idle	idle	idle	idle

The overhead figures give the ROM and RAM required for RTA-OSEK in addition to that required by the application. The RAM figure is shown split into RAM data and RAM stack.

### BCC1

The BCC1 application uses 8 basic tasks with unique priorities.

This application has the following overheads:

Memory Usage	Bytes
<b>OS ROM</b>	<b>1109</b>
<b>OS RAM</b>	<b>436</b>
comprising RAM data	62
comprising RAM stack	374

### BCC2

The BCC2 application uses 8 basic tasks with unique priorities.

Tasks A-G are attached to 7 alarms. Task H is activated multiple times from Task A and has maximum queued activation count of 255.

This application has the following overheads:

Memory Usage	Bytes
<b>OS ROM</b>	<b>1344</b>
<b>OS RAM</b>	<b>442</b>
comprising RAM data	60
comprising RAM stack	382

### ECC1

The ECC1 application uses 7 basic tasks and 1 extended task with unique priorities. Task H is the extended task and it waits on a single event that is set by basic tasks A-G.

This application has the following overheads:

Memory Usage	Bytes
<b>OS ROM</b>	<b>1772</b>
<b>OS RAM</b>	<b>521</b>
comprising RAM data	89
comprising RAM stack	432

### ECC2

The ECC2 application uses 6 basic tasks and 2 extended tasks. Tasks G and H are the extended tasks and share a priority. The extended tasks wait on a single event that is set by tasks A-F.

This application has the following overheads:

Memory Usage	Bytes
<b>OS ROM</b>	<b>2351</b>
<b>OS RAM</b>	<b>672</b>
comprising RAM data	122
comprising RAM stack	530

### Stack Optimization

Using stack optimization with the benchmark example identifies that the following tasks can share internal resources:

- Tasks A, B and C
- Tasks D, E and F
- Tasks G and H

The benefit of this optimization is shown in the following table:

Total Stack Space (bytes)	BCC1	BCC2	ECC1	ECC2
<b>Non-optimized</b>	<b>754</b>	<b>762</b>	<b>812</b>	<b>910</b>
OS Overhead	374	382	432	530
Application Overhead	380	380	380	380
<b>Optimized</b>	<b>344</b>	<b>344</b>	<b>402</b>	<b>402</b>
OS Overhead	164	164	222	222
Application Overhead	180	180	180	180

## Notes

### Contact Addresses

LiveDevices Ltd.  
Atlas House  
Link Business Park  
Osbalwick Link Road  
Osbalwick  
York YO10 3JB, Great Britain  
Phone +44 1904 56 25 80  
Fax +44 1904 56 25 81  
info@livedevices.com

ETAS GmbH  
Borsigstraße 14  
70469 Stuttgart, Germany  
Phone +49 711 89661-102  
Fax +49 711 89661-106  
sales@etas.de

ETAS S.A.S.  
1, place des Etats-Unis  
SILIC 307  
94588 Rungis Cedex, France  
Phone +33 1 56 70 00 50  
Fax +33 1 56 70 00 51  
sales@etas.fr

ETAS Inc.  
3021 Miller Road  
Ann Arbor, MI 48103, USA  
Phone +1 888 ETAS INC  
Fax +1 734 997-9449  
sales@etas.us

ETAS K.K.  
Queen's Tower C-17F  
2-3-5, Minatomirai  
Nishi-ku  
Yokohama 220-6217, Japan  
Phone +81 45 222-0900  
Fax +81 45 222-0956  
sales@etas.co.jp

ETAS Korea Co., Ltd.  
4F, 705 Bldg. 70-5  
Yangjae-dong, Seocho-gu  
Seoul 137-889, Korea  
Phone +82 2 57 47-016  
Fax +82 2 57 47-120  
sales@etas.co.kr

ETAS (Shanghai) Co., Ltd.  
2404 Bank of China Tower  
200 Yincheng Road Central  
Shanghai 200120, P.R. China  
Phone +86 21 5037 2220  
Fax +86 21 5037 2221  
sales.cn@etasgroup.com

[www.etasgroup.com](http://www.etasgroup.com)

Subject to change (07/2007)