


# RTA-OSEK

## Texas Instruments TMS470 Platform with the ADS Compiler

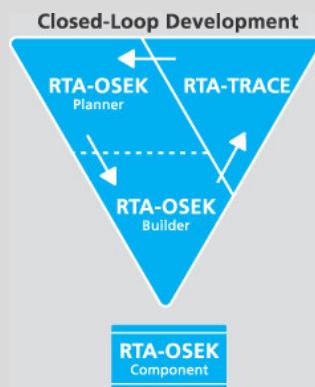

### Features at a Glance

- OSEK/VDX OS version 2.2 certified OS
- RTOS overhead: 26bytes RAM, 156bytes ROM
- Category 2 interrupt latency: 100 CPU cycles
- Applications include: Chassis Control, Body Electronics, Safety Systems

### RTA-OSEK

RTA-OSEK provides an application design environment that combines the smallest and fastest OSEK RTOS with an unique timing analysis tool.

This port data sheet discusses the Texas Instruments TMS470 Platform port of the RTA-OSEK kernel alone and should be read in conjunction with the Technical Product Overview "Developing Embedded Real-Time Applications with RTA-OSEK" available from LiveDevices.

The kernel element of RTA-OSEK is a fixed priority, pre-emptive real-time operating system that is compliant to the OSEK/VDX OS standard version 2.2 for all four conformance classes (BCC1, BCC2, ECC1 and ECC2) and intra processor communication using OSEK COM Conformance Classes A and B (CCCA and CCCB).

All CPU overheads of the kernel have low worst case bounds and little variability in execution time. The kernel is particularly suited to systems with very tight constraints on hardware costs and where run-time performance must be guaranteed.

The kernel is configured using an offline tool provided with RTA-OSEK. Determining in advance which features are used allows memory requirements to be minimized and API calls to be optimized for greatest efficiency.

All tasks and ISRs in RTA-OSEK run on a single stack – even extended tasks. This allows dramatic reductions in application stack space requirements.

The RTA-OSEK kernel is designed to be scalable. When a task uses queued activation or waits on events, the additional RTOS overhead required to support these features is paid by the task rather than by the system. This means that a basic single activation task uses the same resources in a BCC1 system as it does in an ECC2 system.

### Compiler/Assembler/Linker

The libraries containing the code for the RTA-OSEK kernel have been built using the following tools:

- ARM Ltd armcc RVCT2.2 (Build 435)
- ARM Ltd armasm RVCT2.2 (Build 435)
- ARM Ltd armlink RVCT2.2 (Build 435)

### Memory Model

RTA-OSEK for the TMS470 Platform supports a flat memory model.

## ORTI Debugger Support

ORTI is the OSEK Run-Time Interface that is supported by RTA-OSEK for the following debuggers:

- Lauterbach TRACE32

Further information about ORTI for RTA-OSEK can be found in the RTA-OSEK ORTI Guide.

## Hardware Environment

RTA-OSEK supports all variants of the Texas Instruments TMS470 PVF24xPx family.

## Interrupt Model

A single level of interrupts is supported.

## Floating Point Support

RTA-OSEK for the TMS470 Platform is designed to work with the fully reentrant software floating-point libraries supplied by ARM Ltd. This allows floating-point to be used in RTA-OSEK tasks and ISRs without the need to save and restore any additional context.

## Evaluation Board Support

RTA-OSEK for the Texas Instruments TMS470 Platform can be used with any TMS470PVF24xPx evaluation board. An example application is provided to run on the TMS470PVF24xPx Adapter Board evaluation board. This application can be adapted for other target boards by adjusting the linker command file (to alter the RAM locations) and one source file (if alternative output pins are required).

## Functionality

The table below outlines the restrictions on the maximum number of operating system objects allowed by RTA-OSEK.

	BCC1	BCC2	ECC1	ECC2
Max. no of tasks	32 plus an idle task			
Max. tasks per priority	1	32	1	32
Max. queued activations	1	255	1	255
Max. events per task	n/a	n/a	32	32
Max. nested resources	255			
Max. alarms	not limited by RTA-OSEK			
Max. standard resources	255	255	255	255
Max. internal resources	not limited by RTA-OSEK			
Max. application modes	4294967295			

Note that OSEK specifies that queued activations in an ECC2 system are only possible for basic tasks. Where tasks share a priority level, the maximum number of queued activations per priority level is 255.

The number of alarms, tasksets, schedules and schedule arrival-points is only limited by available hardware resources.

## Memory Usage

The memory overhead of RTA-OSEK is:

Memory type	Overhead (bytes)
RAM	26
ROM/Flash	156

In addition to the RTOS overhead, each object used by an application has the following memory requirements:

Object	RAM Bytes	ROM Bytes
BCC1 task	0	36
BCC2 task	10	52
ECC1 task	140	60
ECC2 task	142	68
Category 1 ISR	0	0
Category 2 ISR	0	44
Resource	0	20
Internal Resource	0	0
Event	0	4
Alarm	12	32
Counter	4	44
Taskset (RW)	4	4
Taskset (RO)	0	4
Schedule	16	36
Arrivalpoint (RW)	12	12
Arrivalpoint (RO)	0	12

In addition to these static memory requirements each task priority and Category 2 interrupt has a stack overhead (in addition to application stack usage). The single stack model means that this overhead applies to each priority level rather than to each task. Similarly, for Category 2 interrupts this overhead applies for each unique interrupt priority. The table below shows stack usage for these objects.

Object	Stack Bytes
Task priority level	40
Category 2 interrupt	16

RTA-OSEK provides an optimization for task termination if the user can guarantee that tasks only terminate from their entry function. Tasks that terminate from elsewhere are not eligible for this optimization and duly require 48 more stack bytes per priority level than indicated in the table above.

## Performance

The following table gives the key kernel timings for operating system behavior in CPU cycles.

Task Type	Basic	Extended	Ref
Category 1 ISR Entry Latency	34	34	K
Category 1 ISR Exit Latency	26	26	L
Category 2 ISR Exit Latency	100	104	A
Category 2 ISR Exit Latency	80	80	B
Normal Termination	120	272	D
ChainTask	256	566	J
Pre-emption	202	356	C
Triggered by alarm	310	464	F
Schedule	192	344	Q
ReleaseResource	198	350	M
SetEvent	n/a	648	S
Category 2 exit switch latency	156	302	E

All performance figures are for the non-optimized interface to RTA-OSEK. Using the optimized interface will result in shorter execution times for some operations. All tasks use lightweight termination and no pre or post task hooks were specified.

The execution time for every kernel API call is available on request from LiveDevices.

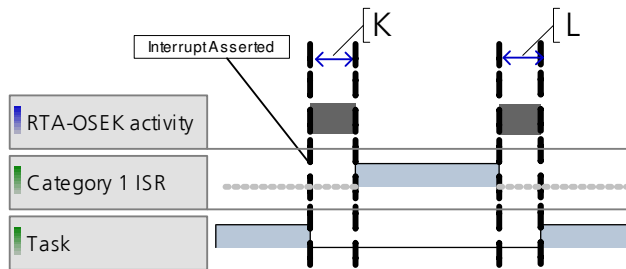


Figure 1 - Category 1 interrupt with return to interrupted task

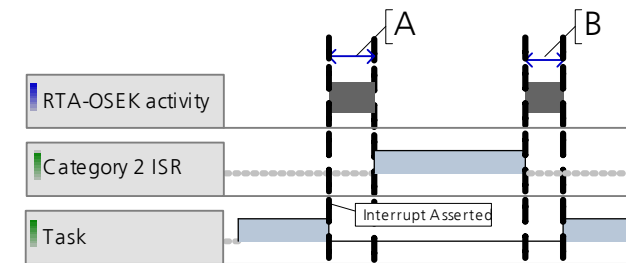


Figure 2 - Category 2 interrupt with return to interrupted task

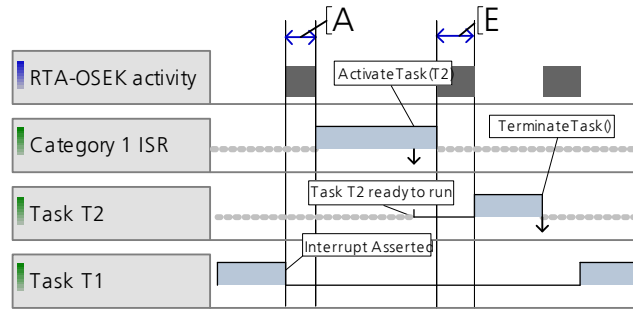


Figure 3 - Category 2 interrupt activates a higher priority task

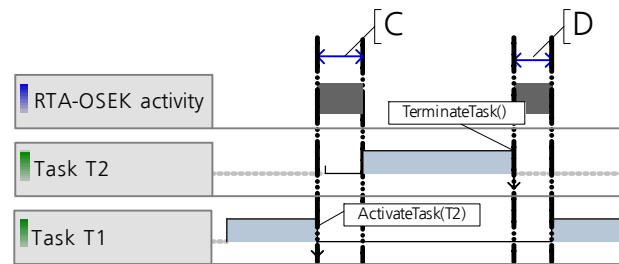


Figure 4 - Task activates a higher priority task

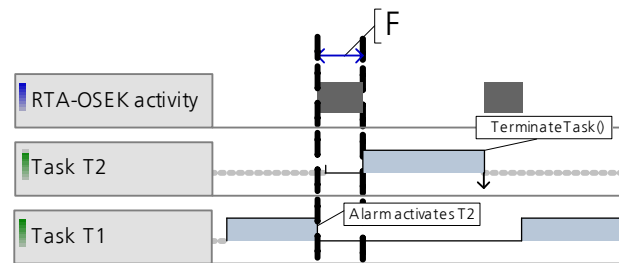


Figure 5 - Alarm activates task

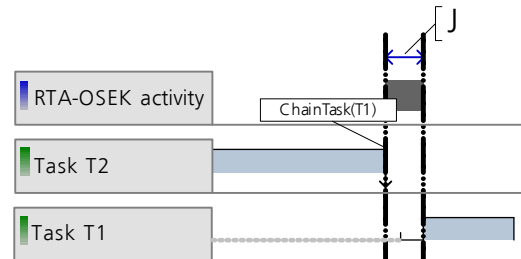


Figure 6 - Task chaining

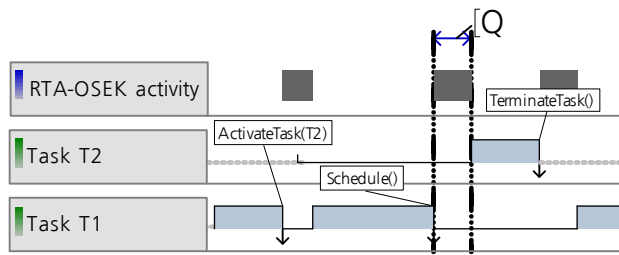


Figure 7 - Schedule() call

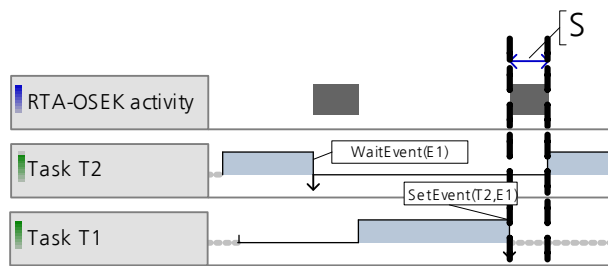


Figure 8 - Activation by SetEvent()

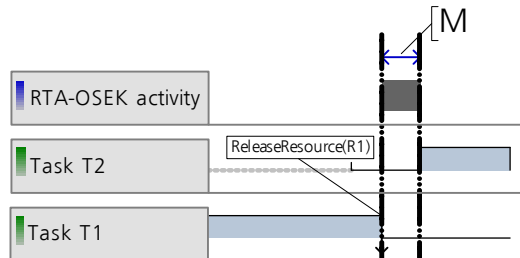


Figure 9 - ReleaseResource()

## Benchmarks

The following sections shows benchmarks for RTA-OSEK memory usage for BCC1, BCC2, ECC1 and ECC2 conformant applications. The applications have the following framework:

- 8 tasks plus the idle task
- All basic tasks are lightweight tasks
- 1 Category 2 ISR with a 10ms minimum inter-arrival time
- 1 Counter
- 7 or 8 alarms, all attached to the same counter
- No resources or internal resources
- No hooks
- No schedules
- No tasksets
- Built using standard status

The following table shows the task priority configuration for each benchmark application:

Task/ISR	Stack (bytes)	Period (ms)	BCC1	BCC2	ECC1	ECC2
ISR1	10	10	IPL1	IPL1	IPL1	IPL1
A	10	10	8	8	8	8
B	20	20	7	7	7	7
C	30	20	6	6	6	6
D	40	30	5	5	5	5
E	50	50	4	4	4	4
F	60	80	3	3	3	3
G	70	100	2	2	2	2
H	80	150	1	1	1	2
Idle	10	-	idle	idle	idle	idle

The overhead figures give the ROM and RAM required for RTA-OSEK in addition to that required by the application. The RAM figure is shown split into RAM data and RAM stack.

## BCC1

The BCC1 application uses 8 basic tasks with unique priorities.

This application has the following overheads:

Memory usage	Bytes
<b>OS ROM</b>	<b>1470</b>
<b>OS RAM</b>	<b>462</b>
comprising RAM data	126
comprising RAM stack	336

## BCC2

The BCC2 application uses 8 basic tasks with unique priorities.

Tasks A-G are attached to 7 alarms. Task H is activated multiple times from Task A and has maximum queued activation count of 255.

This application has the following overheads:

Memory usage	Bytes
<b>OS ROM</b>	<b>1708</b>
<b>OS RAM</b>	<b>466</b>
comprising RAM data	122
comprising RAM stack	344

## ECC1

The ECC1 application uses 7 basic tasks and 1 extended task with unique priorities. Task H is the extended task and it waits on a single event that is set by basic tasks A-G.

This application has the following overheads:

Memory usage	Bytes
<b>OS ROM</b>	<b>2014</b>
<b>OS RAM</b>	<b>778</b>
comprising RAM data	266
comprising RAM stack	512

## ECC2

The ECC2 application uses 6 basic tasks and 2 extended tasks. Tasks G and H are the extended tasks and

share a priority. The extended tasks wait on a single event that is set by tasks A-F.

This application has the following overheads:

Memory usage	Bytes
<b>OS ROM</b>	<b>2446</b>
<b>OS RAM</b>	<b>1168</b>
comprising RAM data	416
comprising RAM stack	752

## Stack Optimization

Using stack optimization with the benchmark example identifies that the following tasks can share internal resources:

"Tasks A, B and C

"Tasks D, E and F

"Tasks G and H

The benefit of this optimization is shown in the following table:

Total Stack Space (bytes)	BCC1	BCC2	ECC1	ECC2
<b>Non-optimized</b>	<b>716</b>	<b>724</b>	<b>892</b>	<b>1132</b>
OS Overhead	336	344	512	752
Application Overhead	380	380	380	380
<b>Optimized</b>	<b>316</b>	<b>316</b>	<b>492</b>	<b>492</b>
OS Overhead	136	136	312	312
Application Overhead	180	180	180	180

### Contact addresses:

LiveDevices Ltd.  
 Atlas House  
 Link Business Park  
 Osbaldwick Link Road  
 Osbaldwick  
 York YO10 3JB, Great Britain  
 Phone +44 (1904) 56 25 80  
 Fax +44 (1904) 56 25 81  
 info@livedevices.com  
 www.livedevices.com

ETAS GmbH  
 Borsigstraße 14  
 70469 Stuttgart, Germany  
 Phone +49 (711) 8 96 61-102  
 Fax +49 (711) 8 96 61-106  
 sales@etas.de  
 www.etas.de

ETAS Inc.  
 3021 Miller Road  
 Ann Arbor, MI 48103, USA  
 Phone +1 (888) ETAS INC  
 Fax +1 (734) 997-9449  
 sales@etas.us  
 www.etas.us

ETAS K.K.  
 Queen's Tower C-17F  
 2-3-5, Minatomirai  
 Nishi-ku  
 Yokohama 220-6217, Japan  
 Phone +81 (45) 222-0900  
 Fax +81 (45) 222-0956  
 sales@etas.co.jp  
 www.etas.co.jp

ETAS S.A.S.  
 1, place des Etats-Unis  
 SILIC 307  
 94588 Rungis Cedex, France  
 Phone +33 (1) 56 70 00 50  
 Fax +33 (1) 56 70 00 51  
 sales@etas.fr  
 www.etas.fr

ETAS Korea Co., Ltd.  
 4F, 705 Bldg. 70-5  
 Yangjae-dong, Seocho-gu  
 Seoul 137-889, Korea  
 Phone +82 (2) 57 47-016  
 Fax +82 (2) 57 47-120  
 sales@etas.co.kr  
 www.etas.co.kr

www.etasgroup.com

Subject to changes (11/05)